SAUTER
IDEEN · MASCHINEN · TECHNIK

FENDT

Options and
Options for municipal implements

Front PTOs

Telescopic top link

Spindle-adjusted top link

Hydraulic pivot links cat. 2

Holders for mower relief springs

Front protector

Ballast container

Tractor triangle

Municipal Mounting plate

Mounting kit for municipal mounting plate

Hooking-in front linkage

Fixed municipal mounting plate

Hydraulic implement relief

Price-list 2023 / 2024

valid from 1st of July 2023

All prices in EUR exclusive of VAT. Deliveries abroad - fob German border. Former types on request. Some options are not available for each tractor type! Design and function of our products are being continuously developed! It is necessary to prove the use and interplay in each individual case between the tractor, the implement and the front loader. We won't bear the costs arising from any matching works.

Hans Sauter GmbH • Auerbachweg 13 • D - 87778 Stetten • Telefon +49 (0) 8261 - 75994-0 • Fax 75994-20 • www.sauter-stetten.com

FENDT

SAUTER
IDEEN · MASCHINEN · TECHNIK

Options
Front PTOs

Standard version
- Front PTO with complete mounting kit

Fendt 200 Vario / P **207 - 208 - 209 - 210 - 211 / P** **ab MY09 bis FendtOne**	- 1000 rpm, gear ratio i = 1.94 / Eco 540 rpm i = 3.06 - Max. continuous pwr 50 kW / 68 HP / Eco 40 kW / 54 HP - Max. power 88 kW / 120 HP / Eco 48 kW / 65 HP - electrohydraulically actuated	**302001** **Eco** **312001**	**3.150,00** **3.450,00**
Fendt 300 Vario **309 - 310 - 311 - 312 – 313** **Com3 / SCR=T4i**	- 1000 rpm, gear ratio i = 1.93 / Eco i = 1.63 - Max. continuous pwr 110 kW / 150 HP / Eco 88 kW / 120HP - Max. power 147 kW / 200 HP / Eco 100 kW / 136 HP - electrohydraulically actuated - with speed sensor - the tractor must be equipped with Fendt front modul, activation necessary for function and speed display	**302005** **Eco** **312005**	**3.610,00** **3.890,00**
Fendt 300 Vario **310 - 311 - 312 - 313 S4=T4f** **311 - 312 - 313 - 314** **GEN4=StV**	- 1000 rpm, gear ratio i = 1,93 - Max. continuous power 110 kW / 150 HP - Max. power 147 kW / 200 HP - electrohydraulically actuated - with speed sensor - the tractor must be equipped with Fendt front modul, activation necessary for function and speed display	**302004**	**3.610,00**
Fendt 400 Vario **409 - 410 - 411 - 412 - 413 - 414 - 415 Com2/3** **Fendt 700** **711 - 712 - 714 - 716 - 718** **Com2/3** **Fendt 800 Vario** **815 - 817 - 818 Com2/3** **818 - 820 Com3**	- 1000 rpm, gear ratio i = 1.93 / Eco i = 1.63 - Max. continuous pwr 110 kW / 150 HP / Eco 88 kW / 120HP - Max. power 147 kW / 200 HP / Eco 100 kW / 136 HP - electrohydraulically actuated Optional scope of delivery: - with speedsensor, if front modul and cableset from Fendt is existing - then with speed display, activation of PTO required - with cableset, if front modul and cableset from Fendt is not existing, than no speed display	**302002** **Eco** **312002**	**3.610,00** **3.890,00**
Fendt 500 Vario **512 - 513 - 514 - 516** **Vario SCR / S4 / GEN3** **Fendt 700 Vario** **714 - 716 - 718 - 720 - 722 – 724 SCR / S4 / GEN6**	- 1000 rpm, gear ratio i = 1.93 / Eco i = 1.63 - Max. continuous pwr 110 kW / 150 HP / Eco 88 kW / 120HP - Max. power 147 kW / 200 HP / Eco 100 kW / 136 HP - electrohydraulically actuated - with speed sensor - the tractor must be equipped with Fendt front modul, activation necessary for function and speed display	**302003** **Eco only up to S4** **312003**	**3.610,00** **3.890,00**

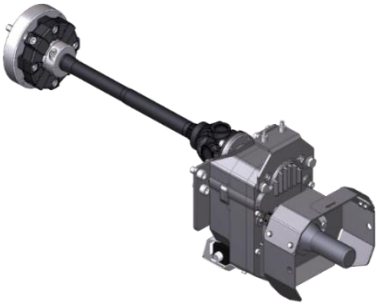

Fendt 800 Vario **819 - 822 - 824 - 826 - 828 SCR** **822 - 824 - 826 - 828 S4**	- 1000 rpm, gear ratio i = 1.93 / Eco i = 1.63 - Max. continuous pwr 110 kW / 150 HP / Eco 88 kW / 120HP - Max. power 147 kW / 200 HP / Eco 100 kW / 136 HP - electrohydraulically actuated - with speed sensor - the tractor must be equipped with Fendt front modul, activation necessary for function and speed display - with conversion kit hydraulic parts	**302006** **Eco 312006**	**4.300,00** **4.570,00**	
Fendt 900 Vario **922 - 924 - 927 - 930 - 933 - 936 Com3** **924 - 927 - 930 - 933 - 936 - 939 SCR** **927 - 930 - 933 - 936 - 939 S4**		**302007** **Eco 312007**	**4.300,00** **4.570,00**	

Options
Telescopic top link cat. 2

Functions - for attachments in floating position - better ground following - easier coupling - lockable				
Cat. 2	please specify working length		**200,00**	

Options
Hydraulic telescopic top link cat. 2

Functions - for implements in floating position - Ground tracking: smooth running clearance for ground-based devices - Hydraulic implement relief: adjustable at any time for tilt function - Handling: larger slope angle through targeted tilting - Transport: shock absorption through integrated pressure accumulator, ideal for tractors without own vibration damping - Maintenance: better accessibility by tilting the device - Operation: intuitive und controllable with double-acting control unit, with pressure gauge Standard version - Hydraulic telescopic top link with accumulator - 2 pcs. hydraulic connection lines				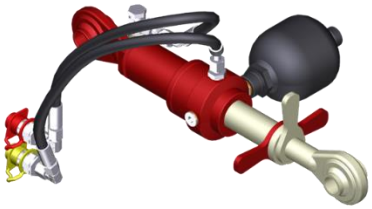
Cat. 2	please specify working length		**700,00**	
with catch hook cat. 2	please specify working length		**760,00**	
Pressure gauge kit			**160,00**	

FENDT

SAUTER
IDEEN · MASCHINEN · TECHNIK

Options
Spindle-adjusted top link

Cat. 2	please specify working length		**80,00**	
Cat. 2 strengthened	please specify working length		**90,00**	
with catch hook cat. 2	please specify working length		**120,00**	
with catch hook cat. 3; lubricable	please specify working length		**170,00**	

Options
Hydraulic pivot links cat. 2

Functions - double-sided panning - easier obstacle avoidance - workspace shift - curve function - direction correction on a slope - turning radius reduction Control - individually - intuitive - foresighted Standard version - Hydraulic pivot links with hydraulic connection lines - Connecting rod - Spindle top link with joint				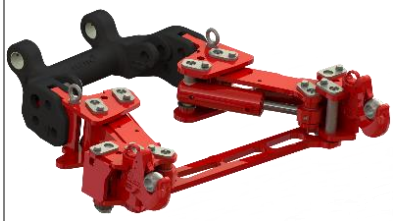
	please specify tractor type		**3.430,00**	

Options
Holders for mower relief springs

Standard version - Holders for mower relief springs - Screw kit				
Fendt 200 Vario / P		617-0134	**270,00**	
Fendt 300 Vario Com 3, SCR = T4i		617-0140	**270,00**	
Fendt 300 Vario from S4 – T4f		617-0138	**320,00**	
Fendt 400 / 500 / 600 / 700 / Vario from Com 2		617-0136	**320,00**	
Fendt 800 Vario Com 2, Com 3		617-0136	**320,00**	
Fendt 900 Vario Com3, SCR up to serial number 1552		617-0142	**350,00**	

FENDT

SAUTER
IDEEN · MASCHINEN · TECHNIK

Options
Front protector cat. 2

Functions
Better perception in traffic night and day
- white marker lamps to the front, side orange, backwards red
- reflecting warning foil at both sides according to ECE104
- enhancement of the vehicle presentation and of the image
- modern and aestethic build and advertising medium

Optimum front protection
- for active and passive security

Variably ballastable from 250 kg up to 1060 kg
- body 250 kg, by a maximum of 9 ballast plates

Strong 3 point suspension, can be put down easily
- lower side is even

Breadth adaptation possible from 2.3 m to 2.7 m
- screwable in 5 cm steps

Side wings, front length is adjustable in 2 positions
- secured with stop and shear pins
- dipsticks as manoeuvering aid

Modular build
- all parts are exchangeable, strong steel sheet construction

View breadth 2,7 m

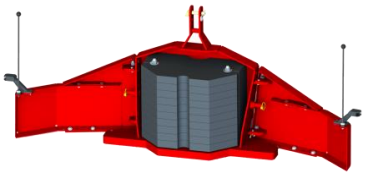

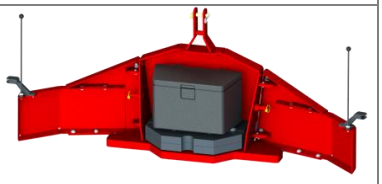

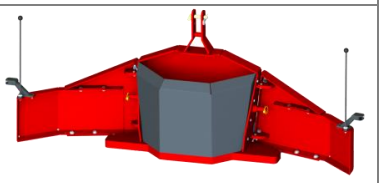

Protector 2,3/2,7 m - 250 kg		**907-5001**	**2.150,00**
Ballast plate 90 kg	max. 9 x 90 kg possible	**907-5002**	**310,00**
Tool box for Front protector	possible total weight 430 kg with max. of 2 ballast plates	**907-5003**	**180,00**
Concrete formwork for Front protector	total weight with basic shell and concrete max. 550 kg	**907-5004**	**190,00**

Options
Ballast container

with catch hooks	empty weight 220 kg with concrete 700 kg	**617-2003**	**1.180,00**
with Walterscheid catch hooks cat. 3 L (see picture)	empty weight 220 kg with concrete 700 kg	**617-2013**	**1.290,00**
1000 without catch hooks	empty weight 170 kg with concrete 1000 kg	**617-2025**	**1.130,00**

FENDT

SAUTER
IDEEN · MASCHINEN · TECHNIK

Options
Tractor triangle cat. 2

Functions
- easier coupling by new form
- optimized coupling points for top links
- lower end - new design
- well-shaped and strong design by a sophisticated profile with high stiffness
- wearing parts as hook and springs can be exchanged
- hook turning point and shape optimised
- lock against rotation integrated in lower link bracket
- for implements up to 1500 kg

suitable for alle types		**617-0015**	**340,00**

Options for municipal implements
Municipal mounting plate

size 3/5 without further mounting parts

Standard version
- Reinforcing plate
- Screw and pin kit

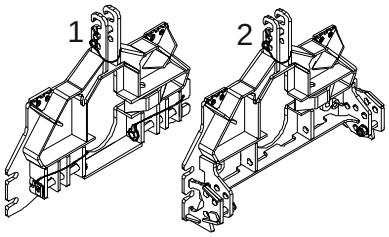

1 suitable for alle types	for short lower links / top link	**617-0409**	**860,00**
2 suitable for alle types	for catch hooks width cat. 2	**617-0409-20**	**1.060,00**

1 Mounting kit with VSS-A plate (Swiss/France) no. xxx-xxxx-1 extra charge 80,00 €

Options for municipal implements
Mounting kit for municipal mounting plate

size 3/5
with short lower links / top link

Standard version
- Municipal mounting plate size 3/5
- Screw kit

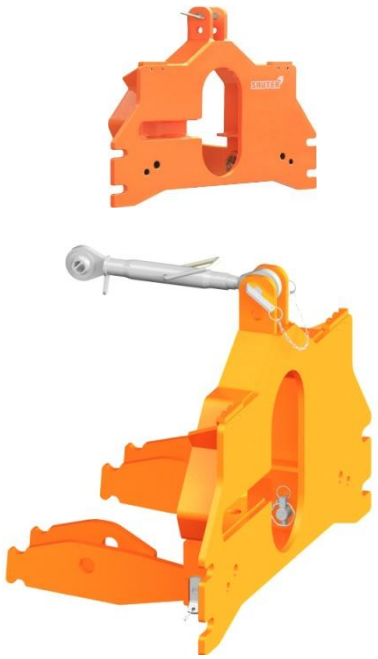

Fendt 200 / Vario / P (for S2=T3)	welded support of lower links (lower links straight fork)	**617-0482**	**1.280,00**
Fendt 200 / Vario / P (from S3=T4i)	cast iron support of lower links (lower links at an angle)	**617-0484**	**1.280,00**
Fendt Xylon, 300, 400, 500, 700, 800, 900, GT, 400 Com2	welded support of lower links (lower links straight fork)	**617-0408**	**1.280,00**
Fendt 800 ab 1.04, 700, 400 Com3 from 3.07	cast iron support of lower links (lower links at an angle)	**617-0417**	**1.280,00**
Fendt 300 Vario	cast iron support of lower links (lower links straight)	**617-0435**	**1.280,00**
Fendt 300 Vario GEN4 StV, S4 from 2015, 500 / 700 SCR=T4i	cast iron support of lower links (lower links at an angle)	**617-0470**	**1.280,00**
Fendt 800 / 900 up to 2014, up to SCR	welded support of lower links (lower links straight fork)	**617-0474**	**1.420,00**
Fendt 800 / 900, from S4	cast iron support of lower links (lower links at an angle)	**617-0485**	**1.420,00**

Options for municipal implements
Hooking-in front linkage

for municipal mounting plate size 3/5 DIN 76060 and VSS-A plate
Lifting power 25 kN (2.5 t)

Standard version
- Walterscheid catch hooks cat. 3 L
- Reversing valve (double-acting/single-acting)
- Hydraulic accumulator
- Short hydraulic hoses with coupler
- Spindle-adjusted top link

		908-2005	3.370,00

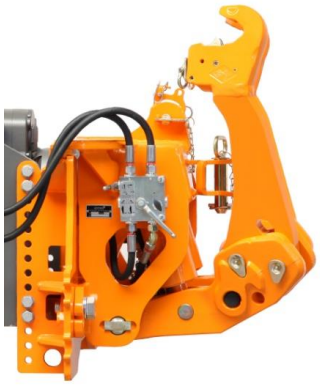

Options for municipal implements
Fixed municipal mounting plate
only possible without a front linkage

Municipal mounting plate with perforated strip
without further mounting parts, with tie bolt

suitable for alle types		980-0038	790,00

1 Mounting kit with VSS-A plate (Swiss/France) no. xxx-xxxx-1 extra charge 80,00 €



Extension (1 set = 2 pc)
with screw kit, max. 1 set per tractor possible

Extension 125 mm		617-0490-1	460,00
Extension 155 mm		617-0490-2	460,00
Extension 185 mm		617-0490-3	460,00
Extension 215 mm		617-0490-4	460,00



Options for municipal implements
Hydraulic implement relief

for mechanical and electrical control units
without hydraulic accumulator

Please contact us for technical advice

		907-3001	2.240,00

Hans Sauter GmbH
Landtechnik - Stahlbau
Auerbachweg 13
87778 Stetten
Deutschland

Telefon +49 (0) 82 61 - 75 994 -0
Telefax +49 (0) 82 61 - 75 994 -20

info@sauter-stetten.com
www.sauter-stetten.com

Subject to printing errors or price changes.

006-6193